

16

**Patent Details****Patent Number** (11) 237767 **Current Status** Expired or not Renewed**International Application Number****WO Publication Number****Patent Type** Patent Non-Convention Complete**Patent Title** (54) METHOD AND DEVICE FOR DETECTING CONCEALED SUBSTANCES**Filed** (22) 09-APR-1992**Class** (51)**Classification**

NZCI04.6

NZCI00.8

IPCIG01N23/06

IPCIG01V5/00

IPCIG21H5/00

**Schedule and Edition**

NZC

NZC

IPC1

IPC1

IPC1

**Documents****Abstract/Abridgement** [Document](#) .9 Kb**Complete Specification** [Document](#) 972.3 Kb [View as PDF](#)**Applicant / Patentee:** (71) HER MAJESTY THE QUEEN IN RIGHT OF NEW ZEALAND .  
DSIR - Physical Sciences, Gracefield Road, Lower Hutt, New Zealand**Contact :** (74) WEST-WALKER, MCCABE . Fraser House, 160-162 Willis St,  
Wellington, New Zealand**Service Address :** As above

| Action                      | Completed   | Due         | Journal | Published   |
|-----------------------------|-------------|-------------|---------|-------------|
| Send Renewal Non-Compliance | 26-NOV-1996 | 26-NOV-1996 |         |             |
| Lapse                       | 09-OCT-1996 | 09-OCT-1996 |         |             |
| Send Renewal Non-Compliance | 09-APR-1996 | 09-APR-1996 |         |             |
| Registered                  | 18-FEB-1995 | 18-FEB-1995 |         |             |
| Published Date              | 27-SEP-1994 | 27-SEP-1994 | 1384    | 27-SEP-1994 |
| Application Accepted        | 19-AUG-1994 | 19-AUG-1994 | 1410    | 26-NOV-1996 |
| Filed                       | 09-APR-1992 | 09-APR-1992 |         |             |

**Related Patents**

No Related Patents found

**Objections / Hearings**

There are no current objections or hearings present

**Renewal Interest**

237767

|                                      |
|--------------------------------------|
| Priority, Date: .....                |
| .....                                |
| Complete Specification Filed: 9.4.92 |
| Class: G01N 23/00, G21H 5/00,...     |
| G01N 5/00.....                       |
| .....                                |
| Publication Date: 27 SEP 1994.....   |
| P.O. Journal, No: 1384.....          |



Patents Form No. 5

~~Number~~ 237767

PATENTS ACT 1953

~~Dated~~ April 9, 1991

COMPLETE SPECIFICATION

METHOD AND DEVICE FOR DETECTING CONCEALED SUBSTANCES

We, HER MAJESTY THE QUEEN in right of New Zealand, having an address at DSIR - Physical Sciences, Gracefield Road, Lower Hutt, New Zealand

do hereby declare the invention for which I/we pray that a Patent may be granted to me/us, and the method by which it is to be performed, to be particularly described in and by the following statement:

KR  
11-6-93

KR  
12-6-93

This invention relates to a method and device for detecting concealed substances such as explosives or drugs.

#### BACKGROUND

Terrorism is frequently in the news. Explosive devices are occasionally concealed in luggage and parcels and smuggled through airports despite the efforts of customs officers. These devices are often not found because the daily volume of luggage and cargo is such that manually searching every item is simply impractical.

The Lockerbie disaster in 1988 highlighted the danger posed by Semtex, a plastic explosive that is difficult to detect by conventional means, particularly when formed into thin sheets. The bomb contained only 1/2 kg of Semtex which was packed into a portable radio.

The US Federal Aviation Administration (FAA) is searching for a means of detecting concealed explosives and has set minimum requirements for such a detection system.

A balance must be struck between the risk of not detecting a bomb and the delay and disruption caused by searching and false alarms since while the detonation of an explosive device in an airport or aircraft is a rare event, delays and disruptions are daily concerns.

Most explosives are characterised by high nitrogen and oxygen content and low carbon and hydrogen content. They are also usually of high density. Aware of this, the FAA began funding tests of thermal neutron activation (TNA) in 1985. TNA involves the use of a radioactive source such as Californium-252 which emits neutrons. The neutrons are slowed or moderated in materials high in hydrogen such as polyethylene (at which stage the neutrons are "thermalized") and are then absorbed by the

object of interest. The absorption leads to the emission of gamma rays which are characteristic of the elements present.

Analysis of these rays provides information as to the nitrogen content of the object bombarded. While explosives characteristically have a high nitrogen content, so do other materials such as certain plastics, silk and nylon which are commonly contained in luggage. Unfortunately TNA screening devices cannot distinguish between explosive materials and these non-explosive materials and so false alarms are often raised which can cause considerable delays. Also, TNA scanning devices require a very intense neutron source and extreme measures are needed to shield airport staff and travellers from the radiation. It is not surprising then that TNA scanning devices have come under criticism.

The sensitivity of these devices is also less than desirable but improving that would also increase the incidence of false alarms which is seen as unacceptable. Furthermore, TNA scanning devices are about the size of a small car, weight 10 tonnes and cost about \$1 million each. And it has been suggested that between 300 and 700 such units would be required to deal with the demands of large international airports in the United States at a cost of \$500 million for the machines plus housing and operating costs of at least \$92 million a year. Alternative scanning devices are clearly required.

Dual beam X-ray machines are being field tested. They can detect organic materials, such as explosives, with one beam and inorganic materials, such as metals, with the other beam.

Hand-held vapour sniffers are also being tested. These take in air and identify molecules in terms of their vapour pressure, atomic weight and liquid solubility by chromatographic means.

237767

New Zealand Patent 237767 Page 4 of 28 printed on Monday 3rd November 2003

Plastic explosives such as Semtex however have a lower vapour pressure than TNT so they can be difficult to detect by such means.

Computerised tomography or CT scanning commonly used in medical diagnosis and research has been applied to the problem by scanning for an object's density, total mass and indicating its atomic number and composition. But as Dr Grodzin of MIT explained at a recent International meeting (International Conference on Accelerators in Industry and Research, Denton, Texas, November 5-9, 1990): "More than a dozen nuclear-based techniques have been proposed for rapidly scanning airport luggage to find hidden explosives by measuring their elemental distributions. In most almost every scheme, the technological challenge is the accelerator, which must produce its intense beams of neutrons and photons ... in an airport environment, perhaps even in an airport concourse".

OBJECT OF THE INVENTION

The object of the present invention is to provide a method and a device for detecting concealed substances such as explosives and drugs which represent improvements upon or at least alternatives to known methods and devices for detecting concealed substances.

SUMMARY OF THE INVENTION

The invention relates to a method for detecting the presence of a number of substances in a container, which comprises irradiating the container with fast neutron and gamma source radiation, measuring the extent to which each species of the source radiation is transmitted through the container, and analysing the measurements with reference to the known characteristic attenuation coefficients and density properties of the substances for each species of the source radiation.

The invention also relates to a device for detecting the presence of a number of substances in a container, which comprises means for irradiating the container with fast neutron and gamma source radiation, means for measuring the extent to which each species of said radiation is transmitted through the container, and means for analysing the measurements with reference to the known characteristic attenuation coefficients and density properties of the substances for each species of the source radiation.

In this specification "container" is intended to include suitcases, bags, packages, boxes, parcels, freight containers and containers of any type for carrying luggage or goods or the like, and in particular "containers" that are moved through airports, shipping terminals and the like.

Also, in this specification "substance" is intended to include any substance that is desired to be detected if present in a container, but the method and device of the present invention will be described in terms of detecting explosives or drugs only.

Preferably the neutron and gamma radiation are emitted substantially simultaneously and they have different flight times to the detectors, or different responses in the detectors so they can be readily distinguished.

Preferably the source radiation is obtained from a radioactive isotopic source such as  $^{252}\text{Cf}$  or Am-Be, perhaps by means of a particle accelerator/target system.

Preferably the device of the present invention has means for conveying a number of containers between the irradiating means and the transmission measuring means.

Preferably the transmission measurements are analysed by a data processor and the results are displayed on a monitor.

Preferably the transmission measurements are combined with data collected by TNA measuring equipment and/or x-ray measuring equipment.

Preferably the device has an alarm system that is triggered when one of the substances is detected.

When the substance for detection is an explosive substance qualitative analysis or detection can be made on the basis that explosive substances characteristically have a high nitrogen and oxygen content but a low carbon and hydrogen content. The thickness or the amount of explosive substance is not required to be known, thus Semtex sheets are no less easily detectable than Semtex sticks or lumps.

Preferably, neutron and gamma radiation are simultaneously transmitted through the container and the reduction of intensities of the two radiations together is analysed to yield information of material thickness and mass attenuation coefficients. The applicant calls this method the "NEUGAT" method (ie neutron/gamma transmission). Preferably a computer is employed to display such information graphically for example by plotting characteristic explosive composition against density so that action can be taken if an explosive-like substance is detected.

Each scan can be analysed as a combination of hypothetical explosive and non-explosive material or, drugs and non-drugs material. This is possible since on average the density of the contents of a suitcase is about  $0.2 \text{ g/cm}^3$  whereas the densities of explosive substances and drugs are typically about  $1.6 \text{ g/cm}^3$  and about  $1.0 \text{ g/cm}^3$  respectively.

Complementary techniques can also be incorporated. For example, positron emission tomography and x-ray scanning can be used in addition to a nuclear technique with neutrons.

The neutron and gamma radiation can be provided from any suitable source, for example a radioactive isotope source such as  $^{252}\text{Cf}$  or Am-Be or a nuclear particle accelerator target system. All sources can be kept well within the limits required for operation in a public work-place. It also provides sufficient precision when detecting explosives since the neutron absorption coefficients vary by only approximately 20%.

Our New Zealand patent specification 213777/214666 discloses a method and an apparatus for quantitatively analysing a mixture of two or more components, such as meat and fat, using neutron/gamma transmission scanning technology. The disclosure of that specification is to be incorporated by reference into the specification of the present application.

According to our New Zealand patent specification 213777/214666, to obtain quantitative analysis of an n-component system, at least n distinguishable species of radiation are required and a mathematical analysis is made by solving the n simultaneous equations describing the extent of transmission of each species of radiation to find the weight fraction of each component. This is described in more detail as follows:



Radiation is passed through the object being measured and the transmitted radiation intensities are measured simultaneously by a suitable detector or array of detectors that is/are connected to an electronic measuring and computing apparatus. In a layered system, a more complex analysis can be made by considering the known length of material through which the radiation passes and the densities of the layered components so that the depths of each layer can be measured.

Each component of the object mixture has a different known mass attenuation coefficient for each species of source radiation. The attenuated intensities (count rates) of neutron and gamma radiation must also be measured when there is no object in the beam to account for background radiation.

When there is an object in the beam the intensities of the neutron and gamma radiation received by the detector(s) can be described in terms of a two-component system for example as follows:

$$I_n = I_{n0} \exp [-(\mu_{na} M_a + \mu_{nb} M_b)] \quad (A)$$

$$I_\gamma = I_{\gamma 0} \exp [-(\mu_{\gamma a} M_a + \mu_{\gamma b} M_b)] \quad (B)$$

wherein  $I_n$  and  $I_\gamma$  are the count rates of neutron and gamma rays after passing through the object;  $I_{n0}$  and  $I_{\gamma 0}$  are their unattenuated count rates;  $\mu_{na}$ ,  $\mu_{nb}$ ,  $\mu_{\gamma a}$  and  $\mu_{\gamma b}$  are the neutron and gamma ray mass attenuation coefficients of components a and b, for the source radiation employed; and  $M_a$ ,  $M_b$  are the mass thicknesses (mass per unit area in the beam) of the components a and b.

Solving these two simultaneous equations (A and B) will give the values of  $M_a$  and  $M_b$  and the weight fraction, for example, of component a, is then simply  $M_a / (M_a + M_b)$ .

It should be noted it is not necessary to know the thickness of the object to make this simple calculation. And the measurement can be integrated over the object volume sensed by the detector or detector array to give the overall weight fraction for that volume.

#### DETAILED DESCRIPTION

A preferred form of device of the present invention is diagrammatically represented in the accompanying drawings by way of example only and they are not intended to limit the scope of protection sought which is defined by the claims. In the drawings:

Figure 1 represents a preferred form of device of the invention for detecting the presence of substances such as explosives or drugs in suitcases, travel bags and other containers of luggage that often pass through the customs section of an airport.

Figures 2 and 3 represent time of flight spectra in the monitor and detectors of the preferred form of device of the invention.

Figure 4 is a graphical representation of the pulsing of radiation by means of a pulsed accelerator.

Figure 5a represents the calculated composition expressed as a weight percent (wt%),  $W$ , against density,  $\rho$ , and shows an operational line called the "NEUGAT" line which in general will be a curve.

Figure 5b is similar to Figure 5a but shows a hypothetical separation of explosives, drugs and clothes signals on which basis a customs officer can decide whether a suitcase should be manually searched.

Figure 6 represents a graphical representation similar to that shown in Figure 5 except the nitrogen gamma count rate is additionally shown by means of a third axis.

A preferred method of the invention and a preferred device of the invention will now be described in detail. The preferred method and device relate to the detection of explosive substances concealed in suitcases, travel bags and the like in an airport environment.

The preferred form of device of the invention 1 shown in Figure 1 has a detection unit 5 through which suitcases, travel bags and other containers 10 can be passed by means of a conveyor 15.

The detection unit 5 houses means for irradiating a container 10 within the detection unit 5 with simultaneous fast neutron and gamma radiation. A number of detectors (not shown in the drawings) are housed in or near to the detection unit 5 and are supported by detection equipment 20. The detectors and the detection equipment 20 enable each species of said radiation to be detected after transmission thereof through the container 10 that is being analysed. The detection equipment 20 is conveniently located below the detection unit 5 and the containers 10 pass through the detection unit 5 one by one between the irradiating means and the detectors.

Data processing facilities such as a computer 25 are connected to the detection unit 5 so that data collected by the detectors of the detection equipment 20 is processed by the computer 25 and displayed by a monitor 30 in a form which a customs officer 35, stationed at the detection unit 5 can readily interpret. If the customs officer 35, having considered the information displayed by the monitor 30, suspects the suitcase or other container 10 contains an explosive substance the customs officer simply stops the conveyor 15 and takes whatever action is required.

-11-

The use of the device 1 avoids the delay and disruption caused by manually searching all or selected containers which pass through the airport. The device 1 may be fully automated so that a customs officer is alerted when the computer 25, programmed with appropriate software, recognises an explosive-like substance in a suitcase or other container 10.

The detection unit 5 contains NaI(Tl) [sodium iodide] or B90 [bismuth germanate] scintillation detectors.

The detection equipment 20 may conveniently comprise, for example, a number of Nuclear Enterprises NE213 liquid scintillators or Bicron BC 501 liquid scintillators (an organic scintillator utilizing proton recoil and pulse shape discrimination), in a cell 15 cm in diameter and 15 cm in thickness, coupled to Philips XP2041 or RCA 8854 photomultiplier tubes. Standard electronic measuring equipment can be used. Such a system, used in conjunction with an Am-Be source of about 10 curie or a 25  $\mu$ g Californium -252 source.

The time of flight spectra in the monitor 30 and detectors are represented in Figures 2 and 3 of the drawings.

The preferred form of device of the present invention operates by scanning the container with fast neutrons and gamma rays to measure the transmission properties, simultaneously measuring the characteristic  $\gamma$ -rays from neutron capture on nitrogen and combining information on container mass and volume. In this way, regions of the scan that are characteristic of explosive substances can be identified.

Lower neutron fluxes are used in comparison to present machines based wholly on the  $^{14}\text{N}(n, \gamma)^{15}\text{N}$  reaction. This eases the problem of using intense radiation sources in an airport environment. The strength of the source used should be about 1% of those presently used.

An important feature of the device 1 is that it measures a key quantity,  $(W)_R$  or  $W$  (described below) which is independent of the thickness of the material within the container that is scanned.

Am-Be or 252-Cf or a pulsed accelerator are suitable for use as sources of radiation but other radioactive materials known to one skilled in the art can be used. The pulsed accelerator involves an energetic deuteron beam (e.g 2 MeV) incident for example on a deuterium gas target, a tritium gas target, a Beryllium or Lithium target producing reactions respectively  $^2\text{H}(d,n)^3\text{He}$ ;  $^3\text{H}(d,n)^4\text{He}$ ;  $^9\text{Be}(d,n)^{10}\text{B}$ ;  $^7\text{Li}(d,n)^8\text{Be}$ , which are all neutron producing reactions.

The pulsed beam allows the separation of neutrons and gamma ray events in time since neutrons take longer times to travel to the detectors than the  $\gamma$ -rays. The beam can pulse as illustrated in Figure 4 wherein the separation of pulses is about 250 ns.

During the short burst periods fast neutrons and  $\gamma$ -rays are detected. During the 100  $\mu\text{s}$  period the  $\gamma$ -rays from neutron thermalisation and capture by  $^{14}\text{N}$  are detected. Detection during the 100  $\mu\text{s}$  period minimises interference from the direct deuteron beam which is off in this period.

### Detection of Drugs and Explosives

Several variations are envisaged:

Equations:

Neutron transmission through container;

$$I_n / I_{no} = \exp - \{\mu_{n1}m_1 + \mu_{n2}m_2\} \quad (1)$$

Gamma transmission through container;

-13-

$$I_{\gamma} / I_{\gamma_0} = \exp - \{\mu_{\gamma_1} m_1 + \mu_{\gamma_2} m_2\} \quad (2)$$

Thickness of contents if pure explosive;

$$x = \ln \left( \frac{I_{\gamma_0}}{I_{\gamma}} \right) / (\mu_{\gamma_{\text{exp}}} \rho_{\text{exp}}) \quad (3)$$

density of contents of container if pure explosive;

$$\text{RHO} = \frac{m_1 + m_2}{x} \quad (4)$$

Contents "factor"

$$W = W_R = \frac{m_1}{m_1 + m_2} \quad (5)$$

the data collected can be graphically represented as shown in Figures 5a and 5b.

Objects are scanned and moment by moment measurements made. Each measurement involves the following:

The results of the analysis of the transmissions of the neutrons and the gamma rays as counted in the detector are represented in a two (or more) dimensional region called a W-RHO plane which is defined by the software. This plane has certain mathematical characteristics which will now be described.

A mixture of two standard materials (which may be fictitious) are characterized by certain mass attenuation coefficients. The real time measurements of this mixture can be represented as follows:

The composition is calculated from equation 5 (usually expressed as a weight percent (wt%), W) by multiplying the result from equation 5 by 100. These wt% values define the Y values in the W-RHO plane. The X values are calculated from the quantity given by equation 4 wherein x is the effective thickness for the particular measurement. The effective thickness is determined from the attenuation of the gamma ray component alone. The expression:

$$\ln(I_{\gamma_0}/I_{\gamma}) = u_{\gamma_1}M1 + u_{\gamma_2}M2 \quad (6)$$

is used to estimate the amount of material in the beam. A value of the wt% is a "working value" that is adopted solely for the purposes of the thickness calculation. The masses per unit area of the two components are indicated here by M1 and M2 (large letters) to distinguish them from the NEUGAT estimates  $m_1$  and  $m_2$  deduced from equations 1 and 2.

$$\text{Now, wt\% } W = (M1/(M1+M2))*100 \quad (7)$$

and equations 6 and 7 can be used to solve for M1 and M2. The effective thickness, x, can be calculated from:

$$x = (M1/\rho_{01}) + (M2/\rho_{02}) \quad (8)$$

wherein  $\rho_{01}$  is the density of pure material 1 and  $\rho_{02}$  is the density of pure material 2. It is this value "x" which is substituted into equation 4 and defines the X axis of the W-RHO plane.

An operational line can be defined on the W-RHO plane but which is only relevant when mixtures of the "standard" materials 1 and 2 are being analyzed. This operational line is called the

-15-

"NEUGAT line" and is analogous to the load line used to represent the range of values which can be taken up by electronic devices such as amplifiers. In general the line will be a curve defined by the equation:

$$W = 100 \left[ \frac{(\rho_1)(\rho_2)}{(\rho_2 - \rho_1)} \cdot \frac{1}{RHO} - \frac{\rho_1}{(\rho_2 - \rho_1)} \right] \quad (9)$$

The end points for NEUGAT measurements are:

$$\text{when } RHO = \rho_1 \text{ then } W = 100 \quad (10)$$

$$\text{when } RHO = \rho_2 \text{ then } W = 0 \quad (11)$$

The NEUGAT line is shown in Figure 5a. The region where data for a sample consisting of 30 wt% material 1 (m1) is also indicated in that Figure. If mixtures of the "standard" materials 1 and 2 are being analysed the data will fall in a group for a certain mixture somewhere along the NEUGAT line.

The thicknesses of material in the beam can vary considerably so real time corrections are preferably made to the mass attenuation coefficients for each measurement in a sequence based on the effective thickness for that measurement. For example:

- (i) The effective thickness of the material is estimated from equation 8.
- (ii) The effective thickness value is used to correct the mass attenuation coefficients based on a predetermined algorithm (usually the coefficients reduce quadratically with increasing thickness).
- (iii) The values of m1 and m2 are estimated using NEUGAT (equations 1 and 2).
- (iv) The composition W is determined using equation 5 and expressed as a weight percent.



-16-

- (v) The results of (i) and (iii) are used to determine RHO.
- (vi) The precision of the measurements of W and RHO can be calculated using a standard statistical analysis such as that described by Tominaga et al in International Journal of Applied Radiation and Isotopes, 34, 429 (1983).

The procedure for making real time measurements of mixtures of the "standard" materials 1 and 2 using NEUGAT alone has been described thus far, however, the importance of the W-RHO plane becomes apparent when different mixtures are used.

The procedure that is now to be described enables real time measurements of mixtures of any chemical combination to be made and interpreted. Every chemical combination will have a grouped response somewhere on the defined W-RHO plane but of course that is now not confined to the NEUGAT line since that was defined solely with respect to the "standard" materials 1 and 2.

The NEUGAT response is unique to each chemical so it can be thought of in terms of a signature or fingerprint. Similar chemicals give similar responses and in fact the distance between the (x,y) values for each chemical grouping is a measure of how similar certain chemicals are. Explosives and drugs have characteristic features and thus distinctive signatures that enable their detection by the invention method and device of the present invention. For example, explosives have characteristically high densities of nitrogen and hydrogen, and while drugs have lesser densities they usually have high hydrogen concentrations. Experimentation will reveal the regions on the W-RHO plane that characterise other groups of chemically similar compounds such as prohibited materials.

-16-

- (v) The results of (i) and (iii) are used to determine RHO.
- (vi) The precision of the measurements of W and RHO can be calculated using a standard statistical analysis such as that described by Tominaga et al in International Journal of Applied Radiation and Isotopes, 34, 429 (1983).

The procedure for making real time measurements of mixtures of the "standard" materials 1 and 2 using NEUGAT alone has been described thus far, however, the importance of the W-RHO plane becomes apparent when different mixtures are used.

The procedure that is now to be described enables real time measurements of mixtures of any chemical combination to be made and interpreted. Every chemical combination will have a grouped response somewhere on the defined W-RHO plane but of course that is now not confined to the NEUGAT line since that was defined solely with respect to the "standard" materials 1 and 2.

The NEUGAT response is unique to each chemical so it can be thought of in terms of a signature or fingerprint. Similar chemicals give similar responses and in fact the distance between the (x,y) values for each chemical grouping is a measure of how similar certain chemicals are. Explosives and drugs have characteristic features and thus distinctive signatures that enable their detection by the invention method and device of the present invention. For example, explosives have characteristically high densities of nitrogen and hydrogen, and while drugs have lesser densities they usually have high hydrogen concentrations. Experimentation will reveal the regions on the W-RHO plane that characterise other groups of chemically similar compounds such as prohibited materials.

Some regions of the W-RHO plane may overlap and so to enable accurate determinations the W-RHO plane can be extended to three or more dimensions by introducing other constraints such as neutron activation.

Figure 5b shows a possible separation of explosives, drugs and clothes using the W-RHO plane NEUGAT approach and Figure 6 shows an extension to three dimensions by including neutron activation data. Four or more dimensions can be used if necessary if a number of complementary methods are brought to bear on the problem.

The presence of nitrogen can be monitored in addition to neutron/gamma transmission using the  $^{14}\text{N}(n,\gamma)^{15}\text{N}$  reaction. This is graphically illustrated in Figure 6.  $C_R$  represents the nitrogen gamma count rate and:

|                  |   |   |
|------------------|---|---|
| $I_n$            | = | transmitted neutrons;   |
| $I_\gamma$       | = | transmitted gamma rays;   |
| $I_{no}$         | = | incident neutrons;  |
| $I_{\gamma o}$   | = | incident neutrons;  |
| $\mu_{n1}$       | = | mass attenuation coefficient for reference material 1 (neutrons);   |
| $\mu_{n2}$       | = | mass attenuation coefficient for reference material 2 (neutrons);   |
| $m_1$            | = | areal density of reference material 1;                              |
| $m_2$            | = | areal density of reference material 2;                              |
| $\mu_{\gamma 1}$ | = | mass attenuation coefficient for reference material 1 (gamma rays); |
| $\mu_{\gamma 2}$ | = | mass attenuation coefficient for reference material 2 (gamma rays); |
| RHO              | = | density;  |
| rho1             | = | density of reference material 1;                                    |
| rho2             | = | density of reference material 2;                                    |

$\mu_{\gamma \text{exp}}$  = mass attenuation coefficient for pure explosive  
(gamma rays);  
 $\rho_{\text{exp}}$  = density of explosive; and

The reference materials are chosen so that materials such as explosives, drugs are conveniently portrayed. The reference materials, which may be hypothetical, are specified by the choice of the mass attenuation coefficients  $\mu_{1n}$ ,  $\mu_{2n}$ ,  $\mu_{1\gamma}$  and  $\mu_{2\gamma}$ .

The positions of the "scan event points" depend on the "relative amounts" of the reference materials present. In actuality, other materials may be present with different mass attenuation coefficients, but particular materials will be grouped in definite regions of the scan event graphs.

The foregoing describes the invention including a preferred method and device thereof. Alterations and modifications as will be obvious to one skilled in the art are intended to be incorporated within the scope of the invention which is defined by the following claims.

237767

WHAT WE CLAIM IS:

1. A method for detecting the presence of a number of substances in a container, which comprises irradiating the container with fast neutron and gamma source radiation, measuring the extent to which each species of the source radiation is transmitted through the container, and analysing the measurements with reference to the known characteristic attenuation coefficients and densities of the substances for each species of the source radiation and determining from the attenuation of both the transmitted neutron and gamma source radiations the presence or otherwise of said substances.
2. A method according to claim 1 wherein the container is irradiated by the fast neutron and gamma radiation substantially simultaneously.
3. A method according to claim 1 or 2 wherein the neutron and gamma source radiation have different frequencies so they can be readily distinguished.
4. A method according to any preceding claim wherein the source of radiation is a radioactive isotopic source.
5. A method according to claim 4 wherein the radioactive source is Californium-252 or Americium-Beryllium.



6. A method according to any preceding claim including carrying out said irradiating, measuring, and analysing in relation to a number of containers sequentially.

7. A method according to any preceding claim wherein thermal neutron activation and/or x-ray measurements are made in addition to the neutron and gamma radiation transmission measurements to aid the analysis.

8. A method according to any preceding claim wherein the transmission measurements are analysed by data processing means and the results are displayed.

9. A method according to any preceding claim wherein an alarm is triggered when at least one of the substances is detected.

10. A method according to any preceding claim wherein the substances are drugs and/or explosives.

11. A method according to any preceding claim wherein the container is a suitcase, bag or package.

12. Apparatus for detecting the presence of a number of substances in a container, which comprises means which irradiates the container with fast neutron and gamma source radiation, means which measures the extent to which each species of said radiation is transmitted through the container, and means which analyses the

237767

measurements with reference to the known characteristic attenuation coefficients and densities of the substances for each species of the source radiation and determines from the attenuation of both the transmitted neutron and gamma source radiations the presence or otherwise of said substances.

13. Apparatus according to claim 12 wherein the irradiating means emits the neutron and gamma source radiation substantially simultaneously.

14. Apparatus according to claim 12 or 13 wherein the irradiating means emits neutron and gamma radiation that have different flight times or detector responses so they can be readily distinguished.

15. Apparatus according to any one of claims 12 or 14 wherein the source radiation is a radioactive source.

16. Apparatus according to claim 15 wherein the radioactive source is Californium-252 or Americium-Beryllium.

17. Apparatus according to any one of claims 12 to 16 wherein the irradiating means and the transmission measuring means are housed in a detecting unit.

18. Apparatus according to any one of claims 12 to 17 which includes means which conveys a number of containers between the



237767

irradiating means and the transmission measuring means.

19. Apparatus according to any one of claims 12 to 18 wherein said analysing means is a data processor.

20. Apparatus according to claim 19 wherein said data processor has a monitor to display the results of the analysis.

21. Apparatus according to any one of claims 12 to 20 further including means which measures thermal neutron activation of the substances in the container and/or x-ray measurement means to aid the analysis.

22. Apparatus according to any one of claims 12 to 21 further including an alarm system that is triggered when at least one of the substances is detected.

23. Apparatus according to any one of claims 12 to 22 which can detect the presence of drugs and/or explosives in suitcases, bags and packages.

WEST-WALKER McCABE

per:

ATTORNEYS FOR THE APPLICANT






1542  
237767

13 JUL 1994

FIG 1

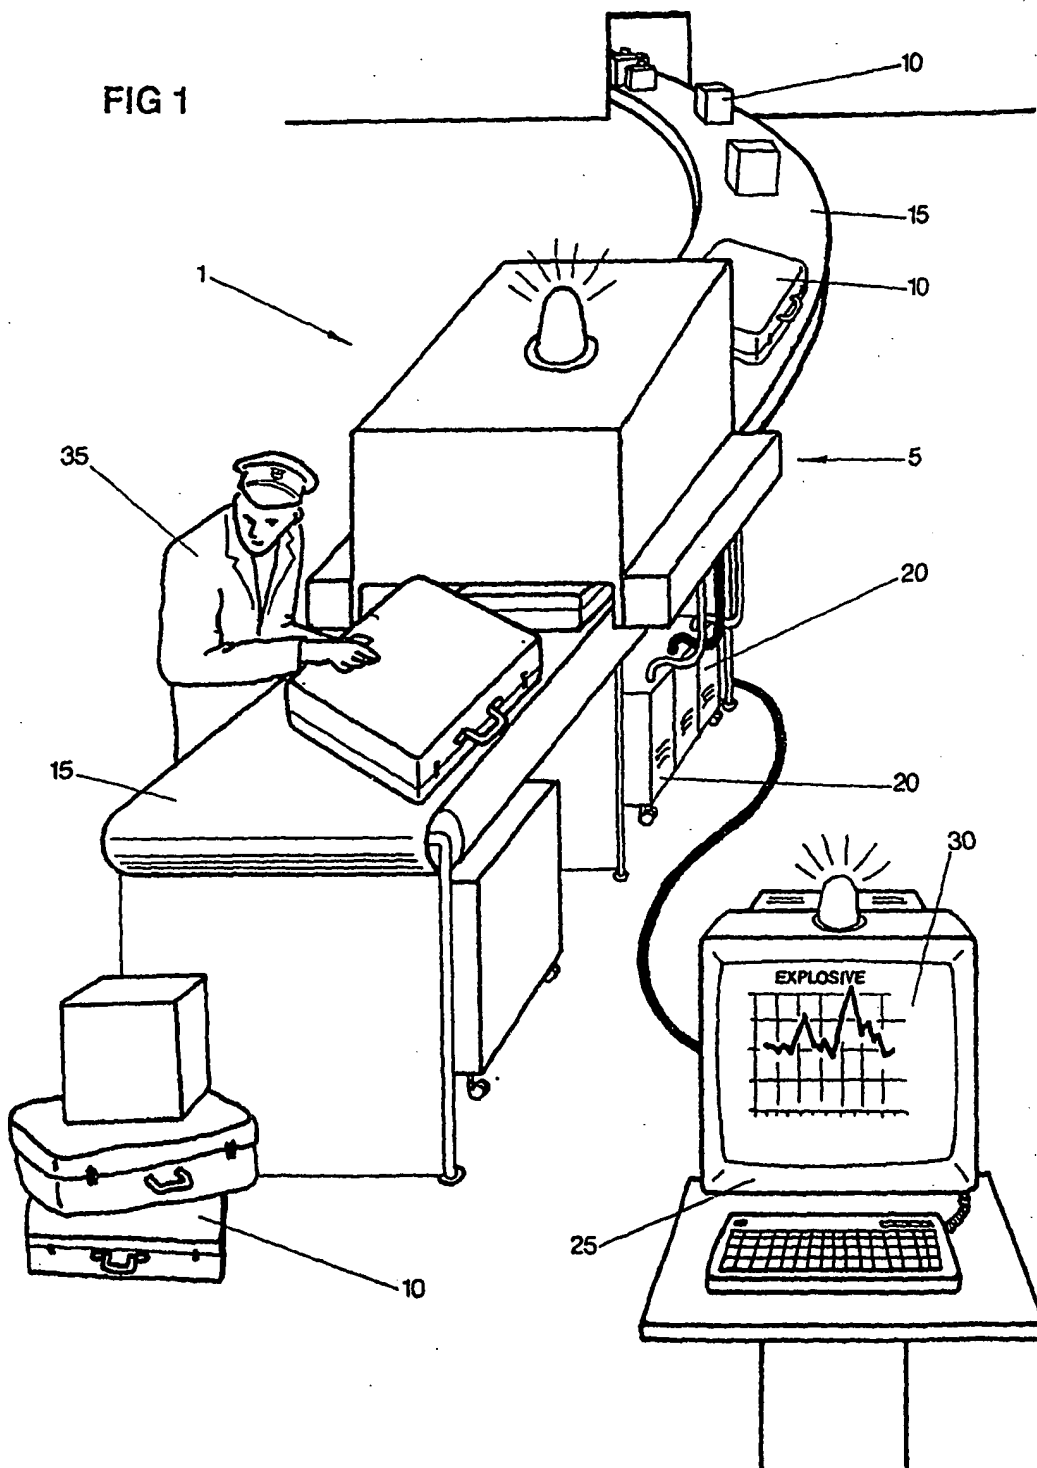

HER MAJESTY THE QUEEN IN  
RIGHT OF NEW ZEALAND  
By Attorneys  
WEST-WALKER, McCABE

*Stamoul*

237767

FIG 2

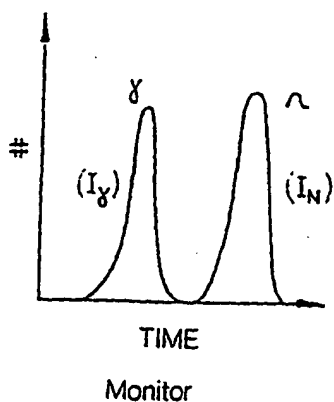


FIG 3

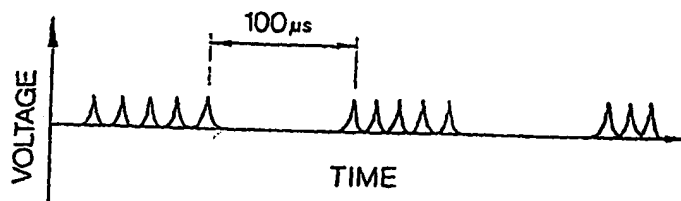
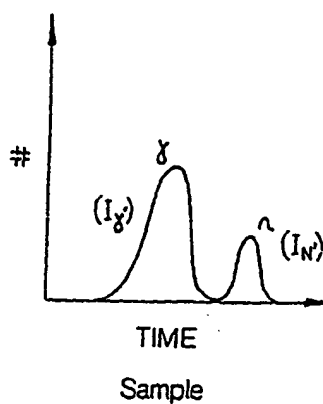


FIG 4

HER MAJESTY THE QUEEN IN  
RIGHT OF NEW ZEALAND  
By Attorneys  
WEST-WALKER, McCABE

*Handwritten signature*

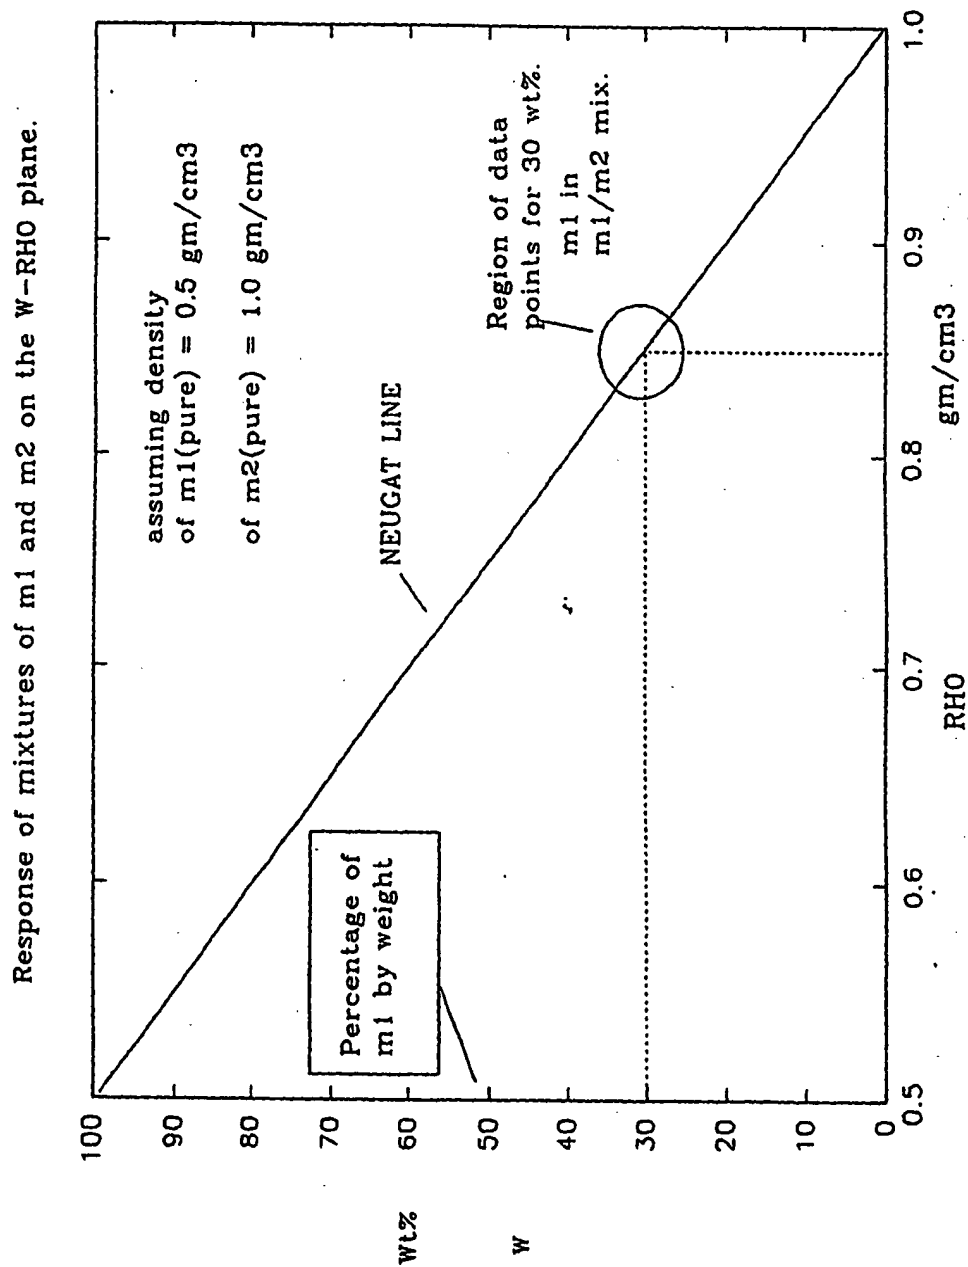


Fig. 5a

HER MAJESTY THE QUEEN IN  
RIGHT OF NEW ZEALAND  
By Attorneys  
WEST-WALKER, MCCABE

*Stewart*

237767

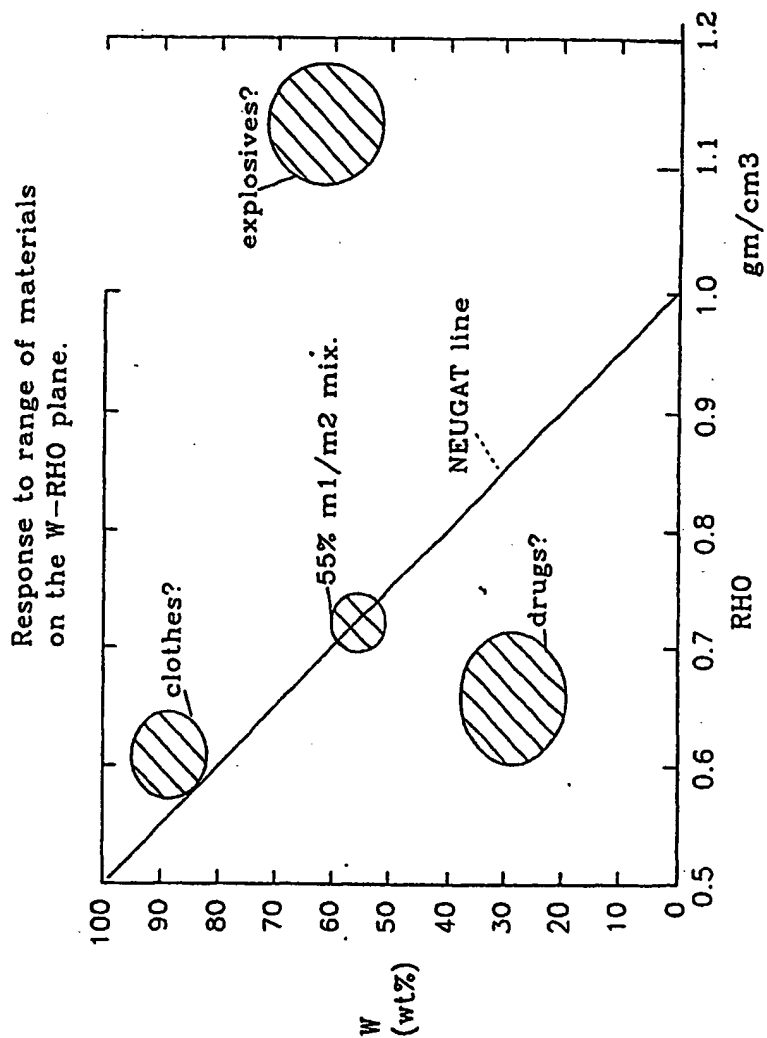


Fig. 5b

HER MAJESTY THE QUEEN IN  
RIGHT OF NEW ZEALAND  
By Attorneys  
WEST-WALKER, MCCABE

*Stewart*

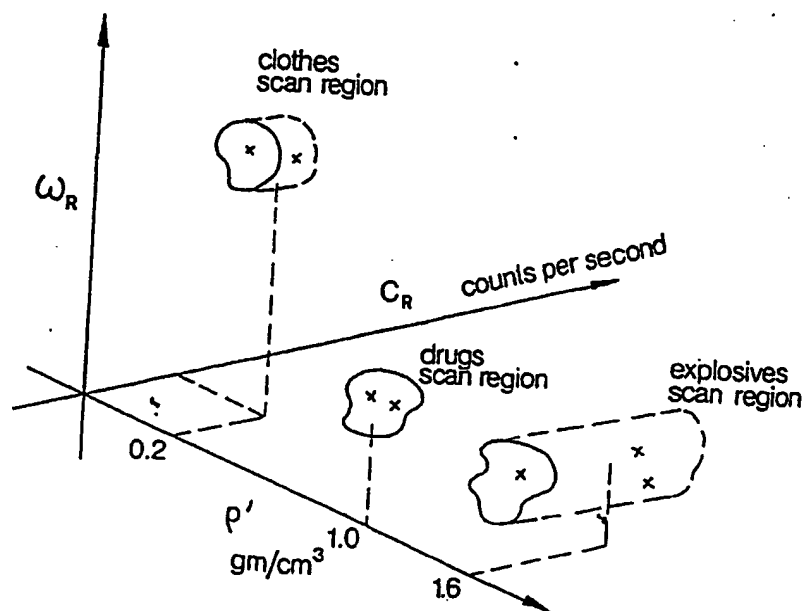


FIG 6

x scan event points

HER MAJESTY THE QUEEN IN  
 RIGHT OF NEW ZEALAND  
 BY ATTORNEYS  
 WEST-WALKER, McCABE

*Handwritten signature*